

Micro cantilever

Product name

OMCL-AC240TS-W2

Silicon cantilever with tetrahedral tip

Product name	
Micro Cantilever	
OMCL-AC240TS-W2	
LotNo.	
Typical Value	Inspection result
Resonant frequency 70 (kHz)	
Spring constant 2 (N/m)	(Calculated Value)
http://www.olympus.co.jp/probe/	
OLYMPUS	

Inspection result

OMCL - AC 240 T S - W 2

OMCL : Olympus Micro Cantilever
 AC : main application is AC mode measurement
 240 : Lever length of 240 μm
 T : Tetrahedral tip
 S : Aluminum reflex coating (Single side)
 W : 375 chips / unit
 2 : Chip thickness 0.3 mm


Chip

There is a rectangular cantilever on one side of the silicon chip.

Dimension

tip side view

side view

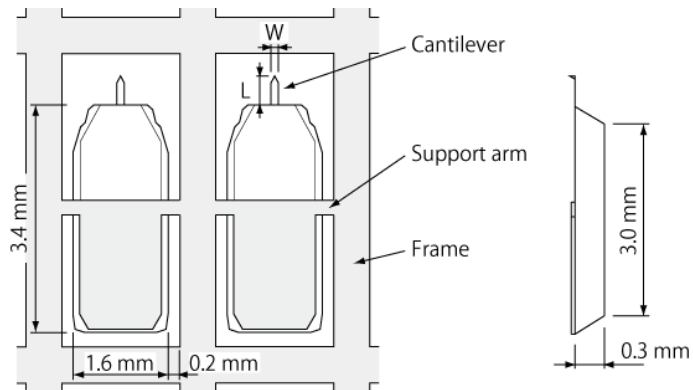


Material

Tip & Lever	Silicon (4 - 6 ohm.cm)
Metal coating (tip side)	Non
Metal coating (back side)	Aluminum on Silicon cantilever
Chip	Silicon (4 - 6 ohm.cm)

Tip

The tip is a sharpened tetrahedral. The tip is fabricated on the exact end of each cantilever.

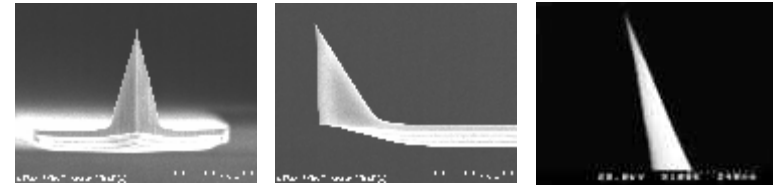

Front

Side

Side (tip apex)


Dimensions

	Typical value	Typical range
Tip height (μm)	15	9 - 19
Tip radius (nm)	7	less than 10
Tip angle (deg.)		(side) less than 35 (front) less than 35

Cantilever

Dimensions

Cantilever length L (μm)	240 (± 20)
Cantilever width W (μm)	30 (± 2)
Cantilever thickness t (μm)	2.8 (± 0.8)
Metal coat thickness tm (μm)	Aluminum 0.1 (± 0.04)



Calculated mechanical properties

	Typical value	Typical range
Resonant frequency (kHz)	70	50 - 90
Spring constant (N/m)	2	0.7 - 3.8

OLYMPUS

OMCL-AC240TS-W2

Ver. 4.1 Oct. 7, 2009